

[Home](#) ■ [Оборудование](#) ■ [Тонкая мех.очистка / фильтрация](#) ■ [Песчаная фильтрация](#) ■
[HUBER Песчаный фильтр CONTIFLOW®](#)

HUBER Песчаный фильтр CONTIFLOW®



Continuous Upflow Volume Filter

- Rapid sand filter for large flow applications
- High operational reliability
- Low operating costs
- Minimum maintenance

Continuous deep bed filtration with sand bed heights between 1 and 2 meter fulfils the high requirements on effluent quality. In combination with a physical/chemical treatment stage (precipitation/flocculation) also dissolved material (e.g. orthophosphate) is carried over into the solid phase and separated in the filter. Colloidal material is agglomerated to filterable material is flocculated to filterable material.

Measurements have shown that the CONTIFLOW® significantly reduces the number of germs. In case of increased disinfection requirements, installation of a subsequent UV disinfection unit is possible due to the low concentration of solids in the filtrate.

The system is available as a steel tank design or concrete basin design for large flow applications. The concrete basin design consists of several modules. Their number can be tailored individually to particular flow and process requirements – up to 12 modules.

The rough surface of the grit particles allows the growth of biomass. The nutrients contained in the inflow, such as nitrogen, are eliminated through biological degradation.

Iron/manganese can be carried over into the solid phase by preceding oxidation and separated by filtration. Elimination of nitrogen and degradation of organic substances is achieved by means of the biologically intensified filtration.

The Sandfilter is also used as a reactor for nutrient reduction with chemical phosphorus elimination through precipitation. Precipitants and flocculants, such as iron or aluminium salts, can be dosed directly into the filter inflow. Due to the reduced precipitant consumption the economic efficiency of chemical phosphorus elimination in the Sandfilter is higher than the economic efficiency of conventional simultaneous precipitation.

детали

Feed is introduced at the top of the filter and flows downward through an opening between the feed pipe and airlift housing. As the influent flows upward through the moving sand bed, the solids are retained in the filter sand. The filtrate exits over a weir at the top of the filter. The sand and the filterable solids are transported through the airlift into the washer in the upper filter section where the solids are separated from the sand. As the sand falls through the washer, a small amount of filtered water passes upward, washing away the dirt, while allowing the heavier, coarser sand to fall through the bed. The wash water, which consists in a certain amount of filtrate water and separated solids, exits near the top of the filter.

преимущества

- Experience with more than 5000 installations worldwide
- Simple and easy-to-maintain system
- Continuous or optionally discontinuous sand washing process with continuous filtration
- Wearing parts reduced to one
- No shutdowns for backwash cycles
- Constant filtrate quality
- Simple wash water treatment
- Minimum pressure drop


примеры из практики

- [HUBER offers convincing key components for a tailor-made 4th treatment stage](#)
- [Removal of micropollutants: Fourth treatment stage with the HUBER Sandfilter CONTIFLOW®](#)


PDF скачать

 [проспект: Песчаный фильтр HUBER CONTIFLOW®](#) [pdf, 800 KB]

схема

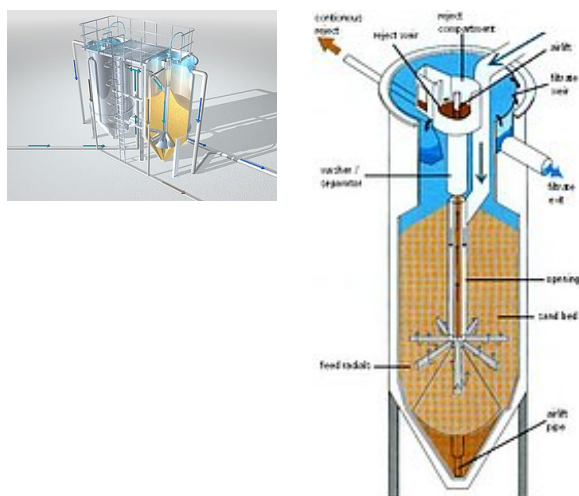

Media

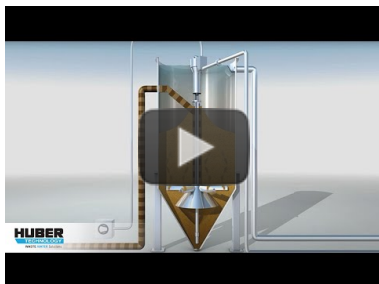

Animation: HUBER Sandfilter
CONTIFLOW®

[https://www.youtube.com/watch?
v=Fa93XrcrxIQ](https://www.youtube.com/watch?v=Fa93XrcrxIQ)



Генеральный директор: Железнов Алексей Игоревич
Адрес: пр-кт Андропова 18, к. 6 · 115432 Москва · Россия · Телефон: +7 499 6830048 · Факс: +7 499 6830048
www.huber-technology.ru · www.huber.de · E-mail: huber@mail.ru · info@huber-technology.ru
Банк ЗАО «ЮниКредит Банк» г. Москва · Расчетный счет: 40702810900010660385 · БИК: 044525545
Корресп. счёт: 30101810300000000545

